


PLAN VIEW

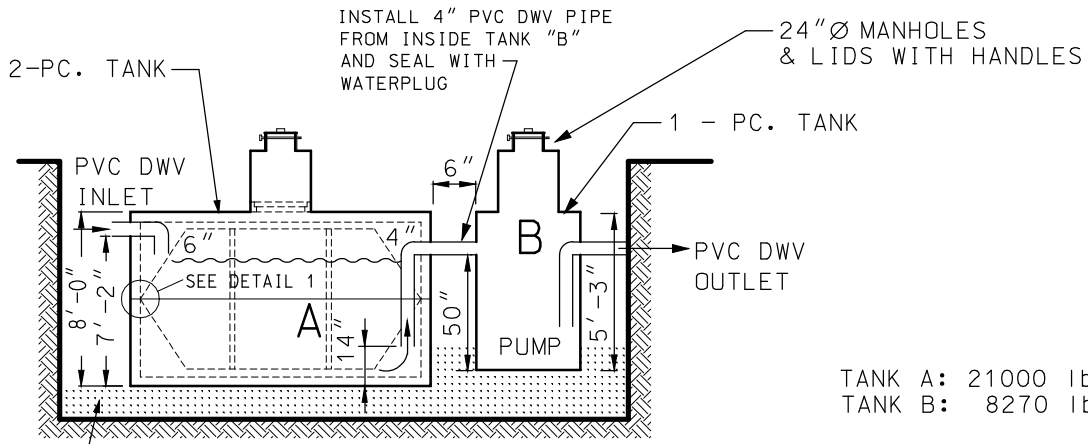

ELEVATION VIEW

4" OF -1" CRUSHED WASHED ROCK LEVELLED

NOTES:

1. IF TANKS ARE NOT INSTALLED DIRECTLY INTO THE EXCAVATION AS RECOMMENDED IN OUR "TERMS & CONDITIONS", THEN PLEASE STORE ON TIMBERS TO PREVENT BREAKAGE AND FREEZING TO THE GROUND.
2. TANK "A" IS LIFTED BY:
 - (A) BOTTOM SECTION- A SLING OR CHAIN AROUND TANK JUST UNDER THICKENED PART NEAR THE TANK TOP.
 - (B) TOP SECTION MUST BE LEVEL & GUIDED PRECISELY ONTO BUTYL SEALANT WHICH IS PLACED ON A DUST, WATER & ICE FREE SURFACE.
3. IN A HIGH WATER TABLE, CONTRACTOR MUST SEAL ALL JOINTS WITH TANK MASTIC ON THE OUTSIDE OF THE TANKS.
4. MAXIMUM EARTH COVER IS FIVE FEET.
5. ALL INTERNAL BAFFLING AND DAMS DETAIL NOT SHOWN.



1810 Yellowhead Trail N.E.
Edmonton, AB T6S 1B4

p 780.472.8265
f 780.478.5699
tf 800.661.5667

info@tanks-a-lot.com
www.tanks-a-lot.com

DRAWN	CHECK	PENG.	ISSUED FOR	DATE	REV
TYPICAL MODEL 4220 OIL/ WATER SEPARATOR					
WIDTH:		LENGTH:		HEIGHT:	
GAL:		LITRES:		EARTH COVER: 5ft or 1.5m max	
WEIGHT	LBS.		DRAWING NO.		REV
	TANK A	21000	4220	OW	A
	TANK B	8270			